



**Whatever You Need
for Milling and Turning
We Offer the Best.**



ROUNDTOP MACHINERY INDUSTRIES CO., LTD.
No. 1056, Zhongshan Rd., Shengang Dist.,
Taichung City 42952, Taiwan (R.O.C.)
Tel : 886-4-2562-4721
Fax: 886-4-2561-3886
<http://www.johnford.com.tw>
E-mail: johnford@johnford.com.tw




Super Turning Centers



**ST-40/60/70/80/100/130/160/200/240
with Turn-mill (B-Axis) - Order Made**

Super Turning Center

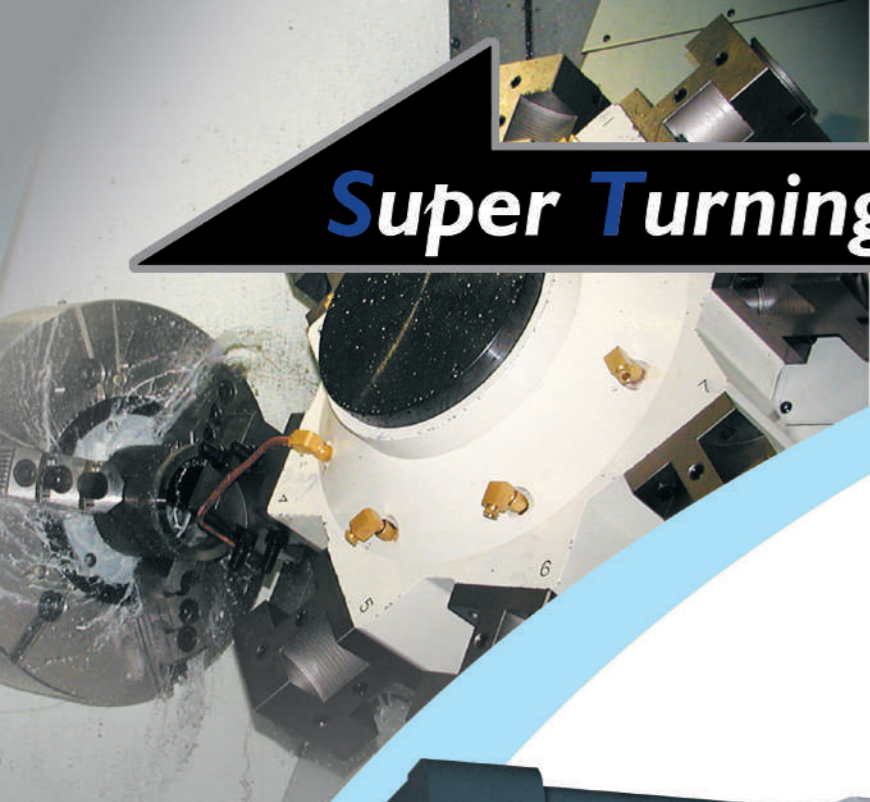


ST-40 / 60

ST= SUPER TURNING CENTER

- ST -
- Addition Type
 - H-Advance
 - X-Opt.
 - Spindle Type
 - A-Bore ϕ 4" (ϕ 115 mm)/A2-8/3000 rpm
 - B-Bore ϕ 5" (ϕ 132.5 mm)/A2-11/2000 rpm
 - C-Bore ϕ 6" (ϕ 152 mm)/A2-15/1500 rpm
 - D-Bore ϕ 7" (ϕ 185 mm)/A2-15/1000 rpm
 - E-Bore ϕ 9" (ϕ 236 mm)/A2-15/750 rpm
 - F-Bore ϕ 10" (ϕ 255 mm)/A2-15/600 rpm
 - G-Bore ϕ 12" (ϕ 318 mm)/A2-20/500 rpm
 - H-Bore ϕ 14" (ϕ 360 mm)/A2-20/400 rpm
 - I-Bore ϕ 16" (ϕ 410 mm)/A2-28/300 rpm
 - Modle (Z Axis Travel)

40-800 mm	130-3050 mm
60-1200 mm	160-4050 mm
70-1600 mm	200-5050 mm
80-2000 mm	240-6050 mm
100-2400 mm	

Dimensions

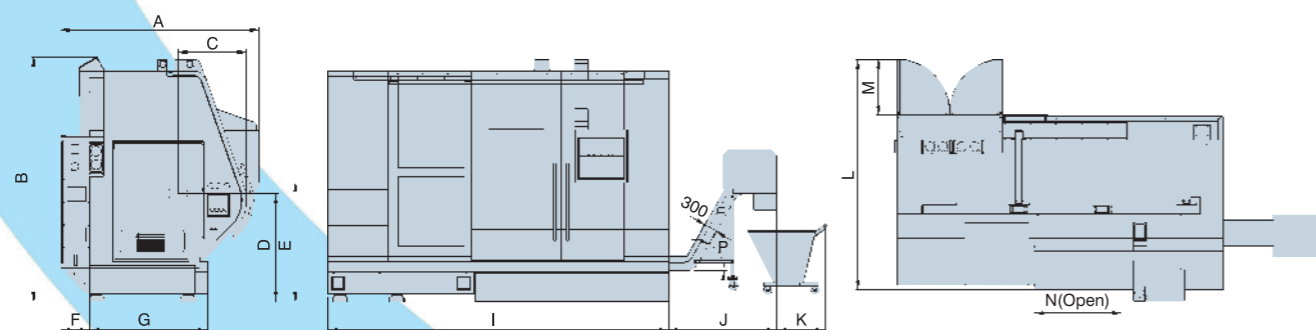

Unit: mm

Model / Item	A	B	C	D	E	F	G	I	J	K	L	M	N	P
ST-40 A/B/C	2270 (89.4")	2765 (108.9")	785 (30.9")	1315 (51.8")	1260 (49.6")	335 (13.2")	1350 (53.1")	3892 (153.2")	1240 (48.8")	560 (22")	2778 (109.4")	713 (28.1")	1030 (40.6")	60°
ST-60 A/B/C	2270 (89.4")	2765 (108.9")	770 (30.3")	1235 (48.6")	1260 (49.6")	335 (13.2")	1350 (53.1")	4292 (169")	1903 (74.9")	560 (22")	2778 (109.4")	713 (28.1")	1250 (49.2")	45°
ST-70 A/B/C	2290 (90.2")	2765 (108.9")	785 (30.9")	1315 (51.8")	1260 (49.6")	335 (13.2")	1350 (53.1")	4692 (184.7")	1790 (70.5")	560 (22")	2778 (109.4")	713 (28.1")	1825 (71.9")	45°

Super Turning Center




Setting the Standard for the Next Century All New
JOHNFORD ST Series CNC Turning Center

The JOHNFORD ST series SUPER TURNING centers are exclusively designed to not only meet today's needs, but also future requirements. These turning centers give you the very finest in turning technology. Rugged construction assures optimum rigidity and stability for years of reliable, trouble free operation. Furthermore, these machines offer the turning accuracy and efficiency that are far beyond ordinary.

ST-130

Dimensions

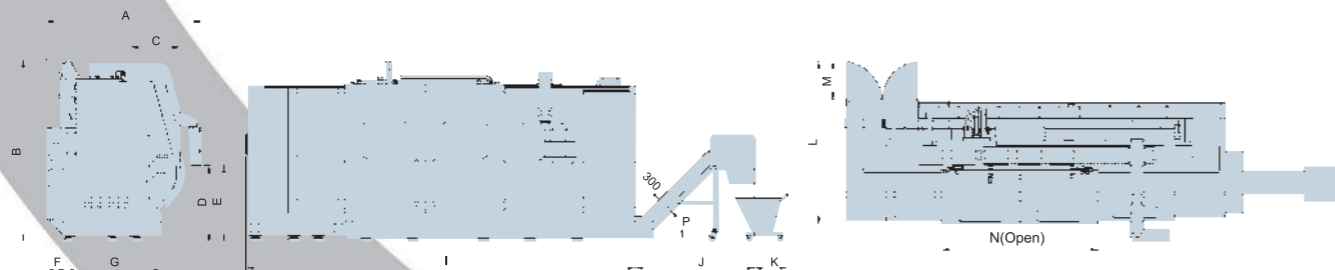

Unit: mm

Model	Item	A	B	C	D	E	F	G	I	J	K	L	M	N	P
ST-80	B/C/D	2460 (96.9")	2870 (113")	740 (29.1")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	5402 (212.7")	2010 (79.1")	560 (22")	2803 (110.4")	713 (28.1")	2490 (98")	45°
ST-100	B/C/D	2460 (96.9")	2870 (113")	768 (30.2")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	5802 (228.4")	2010 (79.1")	560 (22")	2803 (110.4")	713 (28.1")	2595 (102.2")	45°
ST-130	B/C/D	2460 (96.9")	2870 (113")	768 (30.2")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	6602 (259.9")	2010 (79.1")	560 (22")	2803 (110.4")	713 (28.1")	3370 (132.7")	45°
ST-160	B/C/D	2500 (98.4")	2870 (113")	770 (30.3")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	8000 (315")	2010 (79.1")	560 (22")	2913 (114.7")	713 (28.1")	4100 (161.4")	45°
ST-200	B/C/D	2500 (98.4")	2870 (113")	770 (30.3")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	9000 (354.3")	1846 (72.7")	560 (22")	2913 (114.7")	713 (28.1")	5100 (200.8")	50°
ST-240	B/C/D	2500 (98.4")	2870 (113")	770 (30.3")	1270 (50")	1290 (50.8")	335 (13.2")	1350 (53.1")	10000 (393.7")	1590 (62.6")	560 (22")	2913 (114.7")	713 (28.1")	6100 (240.2")	60°

Advanced Structure


2-speed Belt Type Gearbox (Std.)

4-speed Belt Type Gearbox (Std.)


4-speed Geared headstock (Opt.)



High precision spindle is the most suitable to do heavy cutting with rigid structure. It has great power exceeding the turning machines of the same grade in the industry.



Turn-mill (B-axis) (Opt.)




Turrets

- High stiffness and accuracy (positioning $\pm 3'$ / repeatability $\pm 1'$)
- High loading capacity:
 1. \downarrow 1589 kgf-m \rightarrow 1675 kgf-m \leftarrow 800 kgf-m for CLT-160
 2. \downarrow 2512 kgf-m \rightarrow 4025 kgf-m \leftarrow 2029 kgf-m for CLT-200/300
- Clamping forces :
 1. 4200 kgf for CLT-160
 2. 11130 kgf for CLT-200 / 300




- Programmable hydraulic tailstock with
 - Larger tailstock quill diameter and taper.
 - Tailstock quill travel with limit switch control.
 - Rotary spindle is standard.

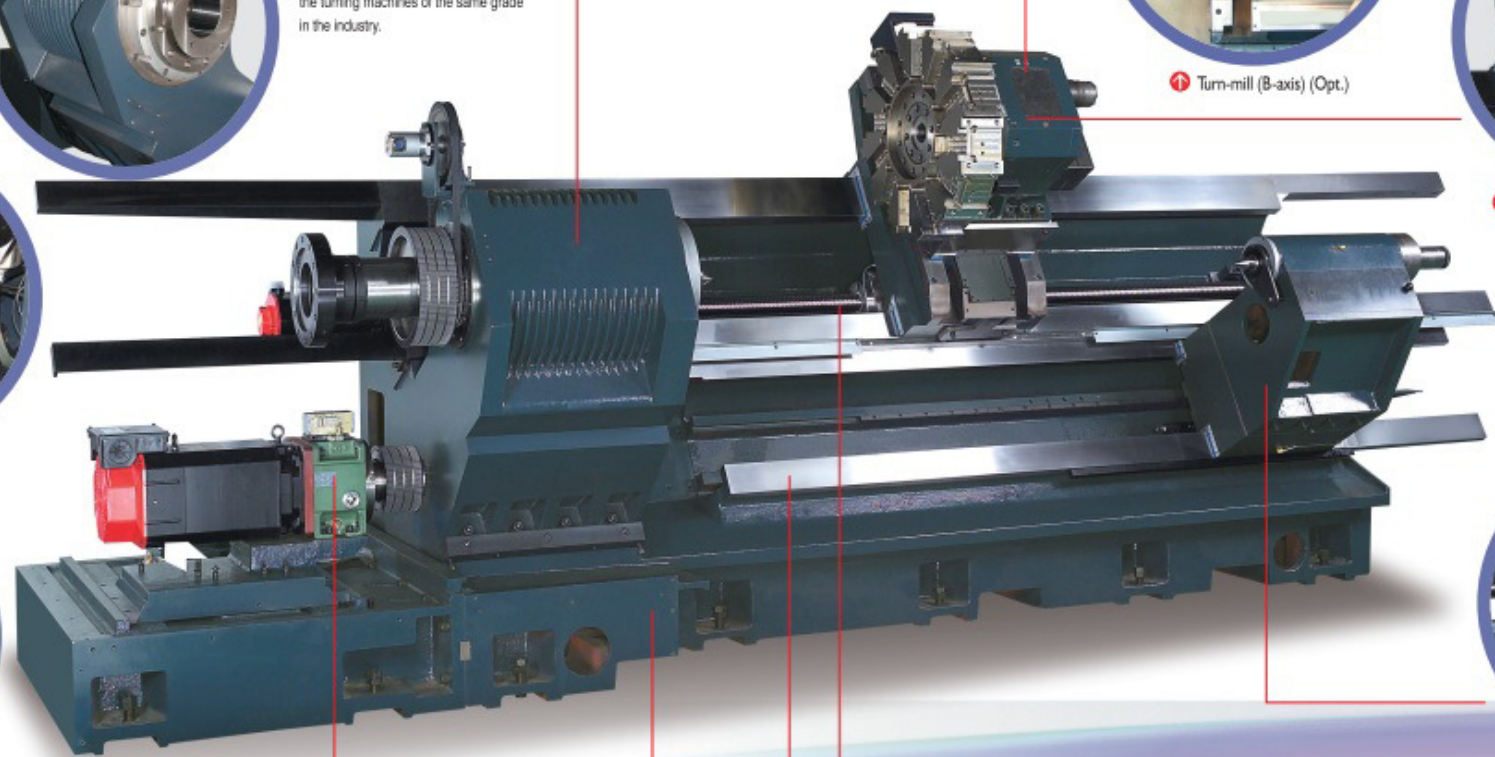

The speed change gearbox is standard on all models which give high torque output for cutting. There are two types of gearboxes for your choice, which are the type of two speeds with auto Hi-Lo steps and the type of auto 4 speeds. They handle heavy duty cutting with ease and offer proper speed range for light and medium cutting as well. There are also two optional gearboxes for your choice, which are 4-speeds Built-in type and 2-speeds ZF gearboxes. If you need extra duty cutting on low speed with high torque, the 4-speeds Built-in type gearbox is your best option.

The bed of machine is made from high quality Meehanite cast iron, one piece cast and scientifically constructed for high stability, rigidity, and accuracy.



All slideways are hardened, precision ground coated with TURCITE-B plus master scraping, ensuring smoothness, accuracy and durability.



Large diameters of ball screws are as below:
 ST-40/60/70 ϕ 50 mm(2") for X axis and ϕ 50 mm(2") for Z axis
 ST-80/100/130 ϕ 50 mm(2") for X axis and ϕ 63 mm(2.5") for Z axis
 ST-160/200/240 ϕ 50 mm(2") for X axis and ϕ 70 mm(2.8") for Z axis
 They are pretensioned to eliminate thermal growth.

12-Angle Turret Working Capacity/Range


12-VDI Turret Working Capacity/Range

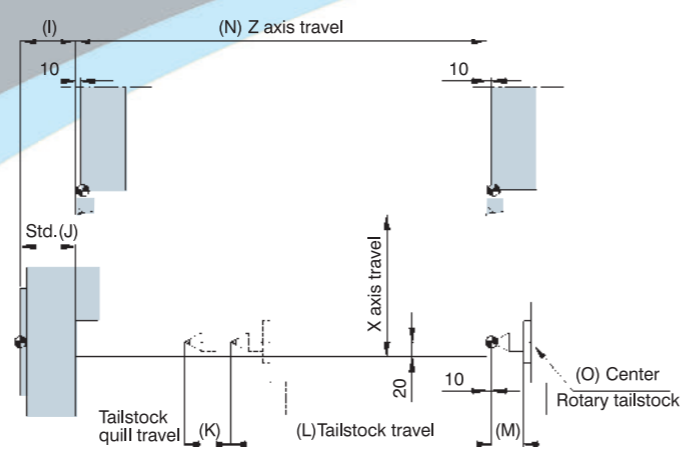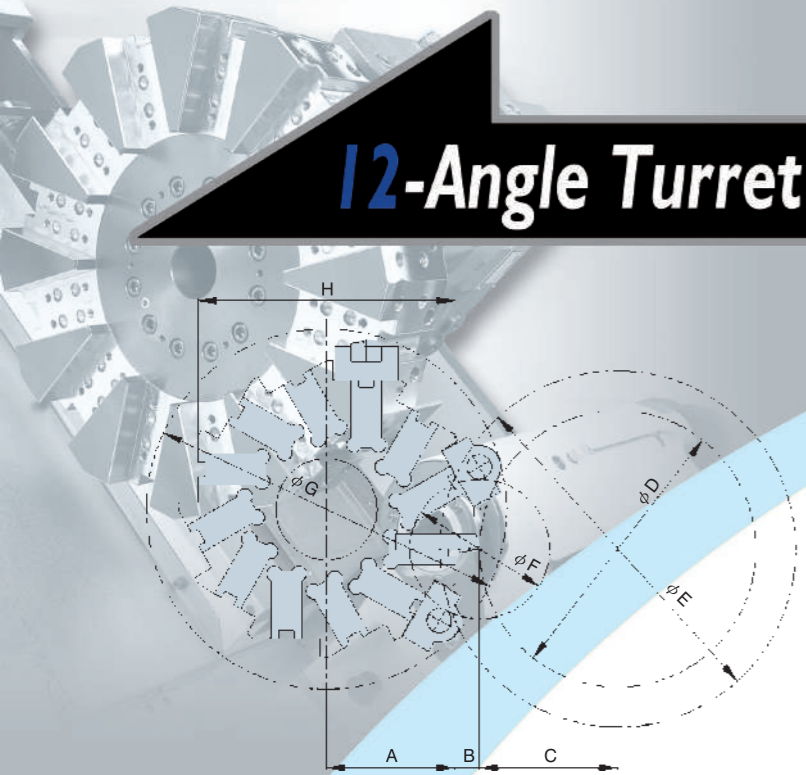

*See the specification.

Unit: mm

Model	Item	A	B	C	D	E	F	G	H	Model	Item	K	L	M	N	O	Spindle Type	
Std. series																		
ST-40/60/70		230(9")	36(1.4")	300(11.8")	600(23.6")	790(31.1")	160(6.3")	630(24.8")	460(18.1")	ST-40	125	500 (19.7")	110	800 (31.5")			MT.5	I / J
ST-80/100/130/160/200/240		320(12.6")	60(2.4")	350(13.8")	700(27.6")	920(36.2")	200(7.9")	875(34.4")	640(25.2")	ST-60	(4.9")	900 (35.4")	(4.3")	1200 (47.2")			MT.5	A type
H series																		
ST-40/60/70		230(9")	36(1.4")	350(13.8")	700(27.6")	920(36.2")	160(6.3")	630(24.8")	460(18.1")	ST-70		1300 (51.2")		1600 (63")			MT.5	A type
ST-80/100/130/160/200/240		320(12.6")	60(2.4")	400(15.7")	800(31.5")	1000(39.4")	200(7.9")	875(34.4")	640(25.2")	ST-80		1700 (66.9")		2000 (78.7")			MT.7	B type
X series																		
ST-40/60/70		320(12.6")	60(2.4")	400(15.7")	800(31.5")	1020(40.2")	200(7.9")	875(34.4")	640(25.2")	ST-100		2100 (82.7")		2400 (94.5")			MT.7	B type
ST-80/100/130/160/200/240		320(12.6")	60(2.4")	500(19.7")	1000(39.4")	1200(47.2")	200(7.9")	875(34.4")	640(25.2")	ST-130	150	2800 (110.2")	126	3050 (120")			MT.7	C type
										ST-160	(5.9")	3600 (141.7")	(5")	4050 (159.4")			MT.7	C type
										ST-200		4750 (187")		5050 (198.8")			MT.7	D type
										ST-240		5400 (212.6")		6050 (238.2")			MT.7	D type

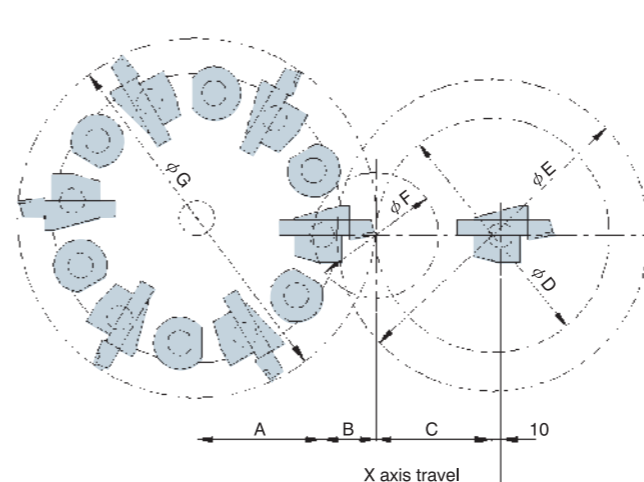



*See the specification.

Unit: mm

Model	Item	A	B	C	D	E	F	G	H	Model	Item	K	L	M	N	O	Spindle Type	
Std. series																		
ST-40 / 60 / 70	Std.			246(9.7")	492(19.4")	790(31.1")		720(28.3")		ST-40	125	500 (19.7")	110	800 (31.5")			MT.5	I / J
(A, B, C type)	H series	200(7.9")	64(2.5")	296(11.7")	592(23.3")	920(36.2")	170(6.7")	820(32.3")	67(2.6")	ST-60	(4.9")	900 (35.4")	(4.3")	1200 (47.2")			MT.5	A type
	X series			346(13.6")	692(27.2")	1020(40.2")		900(35.4")		ST-70		1300 (51.2")		1600 (63")			MT.5	A type
ST-80	Std.			296(11.7")	592(23.3")	920(36.2")		820(32.3")		ST-80		1700 (66.9")		2000 (78.7")			MT.7	B type
(B, C, D type)	H series	200(7.9")	64(2.5")	346(13.6")	692(27.2")	1000(39.4")	170(6.7")	900(35.4")	67(2.6")	ST-100		2100 (82.7")		2400 (94.5")			MT.7	B type
ST-100~up(B type)	X series			446(17.6")	892(35.1")	1200(47.2")		1000(39.4")		ST-130	150	2800 (110.2")	126	3050 (120")			MT.7	C type
ST-100~up	Std.			283.5(11.2")	567(22.3")	920(36.2")		820(32.3")		ST-160	(5.9")	3600 (141.7")	(5")	4050 (159.4")			MT.7	C type
(C/D type)	H series	245(9.6")	76.5(3")	333.5(13.1")	667(26.3")	1000(39.4")	212(8.3")	900(35.4")	72(2.8")	ST-200		4750 (187")		5050 (198.8")			MT.7	D type
(Bigger Turret)	X series			433.5(17")	867(34.1")	1200(47.2")		1000(39.4")		ST-240		5400 (212.6")		6050 (238.2")			MT.7	D type

Tool


Direct Mount

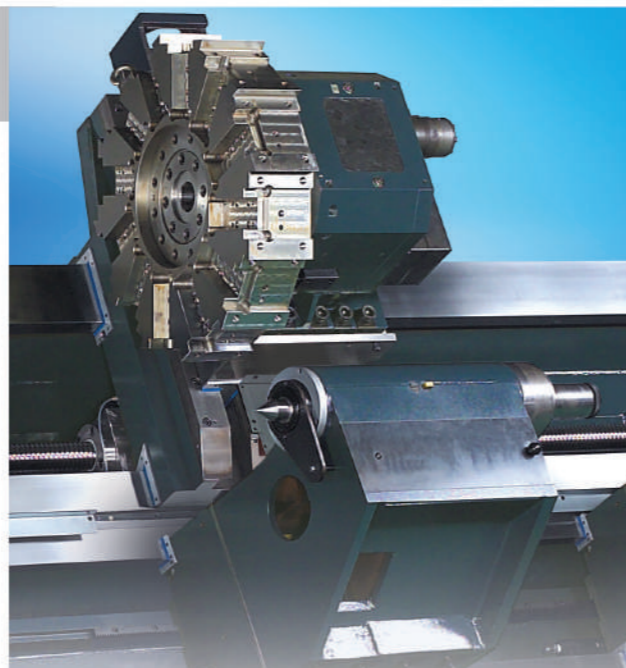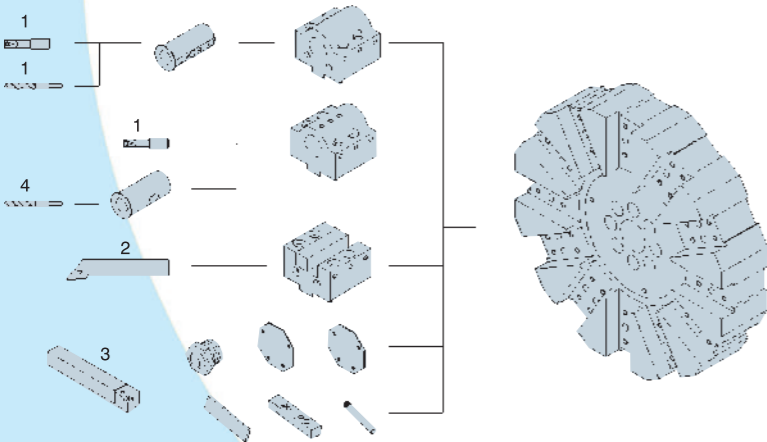

No.	Tool Model	ST-40~70 A, AH, B, BH, C, CH series		ST-40~70 AX, BX, CX ST-80~240 B, BH, BX, C, CH, CX, D, DH, DX series	
		Metric System	Imperial System	Metric System	Imperial System
1	Bore	φ 12, φ 16, φ 20, φ 25, φ 32, φ 40, φ 50	φ 1/2", φ 5/8", φ 3/4", φ 1", φ 1-1/4", φ 1-1/2", φ 2"	φ 12, φ 16, φ 20, φ 25, φ 32, φ 40, φ 50, φ 60	φ 1/2", φ 5/8", φ 3/4", φ 1", φ 1-1/4", φ 1-1/2", φ 2", φ 3"
2	End	□ 32	□ 1-1/4"	□ 32	□ 1-1/4"
3	Outer dia.	□ 32	□ 1-1/4"	□ 32	□ 1-1/4"
4	Drill	MT#2, #3, #4, #5		MT#2, #3, #4, #5	

Tool



VDI (Opt.)

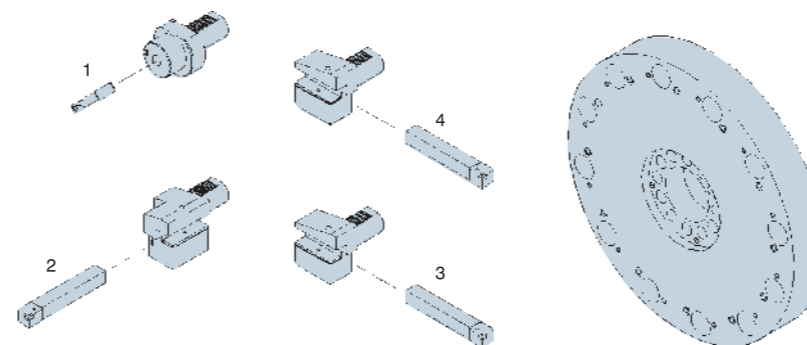

No.	Tool Model	ST-40 / 60 / 70 series	ST-80 / 100 / 130 / 160 / 200 / 240 series
		1	Bore
2	End	□ 32	□ 32
3	Outer dia.	□ 32	□ 32
4	Drill	MT#1, #2, #3	MT#2, #3, #4

BMT Turret Working Capacity/Range

Spindle Power & Torque Chart

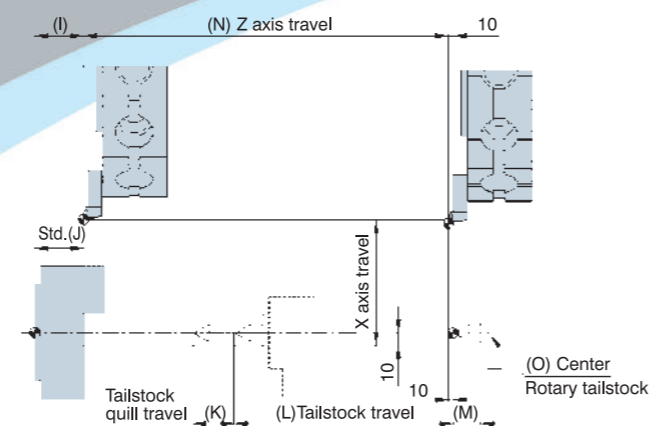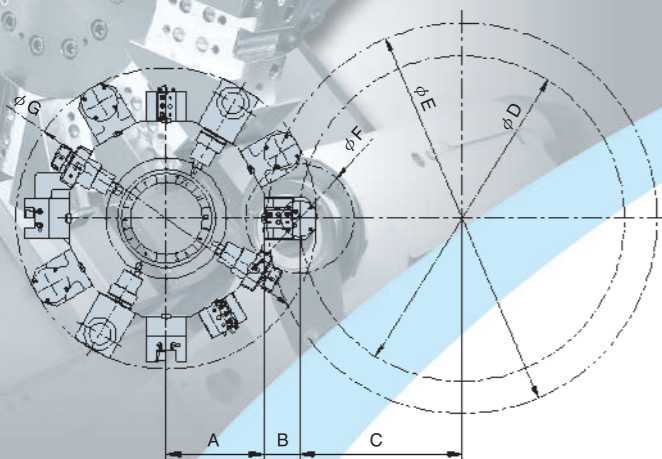

*See the specification.



Unit: mm

Model	Item	A	B	C	D	E	F	G
ST-40 / 60 / 70 (A, B, C type)	Std.	265	90	300(11.8")	600(23.6")	790(31.1")	250	720(28.3")
	H series	(10.4")	(3.5")	350(13.8")	700(27.6")	920(36.2")	820(32.3")	820(32.3")
	X series			400(15.7")	800(31.5")	1020(40.2")	900(35.4")	900(35.4")
ST-80 (B, C, D type)	Std.	265	90	350(13.8")	700(27.6")	920(36.2")	250	820(32.3")
	H series	(10.4")	(3.5")	400(15.7")	800(31.5")	1000(39.4")	900(35.4")	900(35.4")
	X series			500(19.7")	1000(39.4")	1200(47.2")	1000(39.4")	1000(39.4")
ST-100~up(B type)	Std.	300	110	350(13.8")	700(27.6")	920(36.2")	280	820(32.3")
	H series	(11.8")	(4.3")	400(15.7")	800(31.5")	1000(39.4")	900(35.4")	900(35.4")
	X series			500(19.7")	1000(39.4")	1200(47.2")	1000(39.4")	1000(39.4")

Model	Item	K	L	M	N	O	Spindle Type
ST-40	125	300 (11.8")	110	600 (23.6")	MT.5	I / J	122
ST-60	(4.9")	700 (27.6")	(4.3")	1000 (39.4")	A type	(4.8")	
ST-70		1100 (43.3")		1400 (55.1")	MT.7	B type	149
ST-80		1500 (59.1")		1800 (70.9")			155
ST-100		1900 (74.8")		2200 (86.6")			155
ST-130		2600 (102.4")	126	2850 (112.2")			155
ST-160	(5.9")	3550 (139.8")	(5")	3850 (151.6")	D type	(6.1")	
ST-200		4550 (179.1")		4850 (190.9")			
ST-240		5200 (204.7")		5800 (228.3")			

Tool



Direct Mount

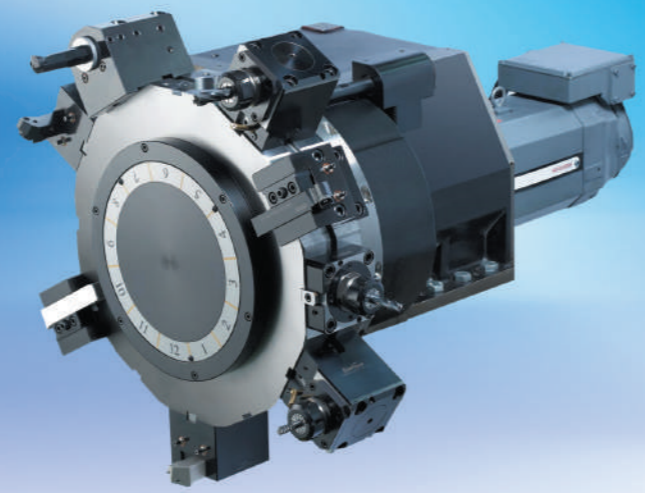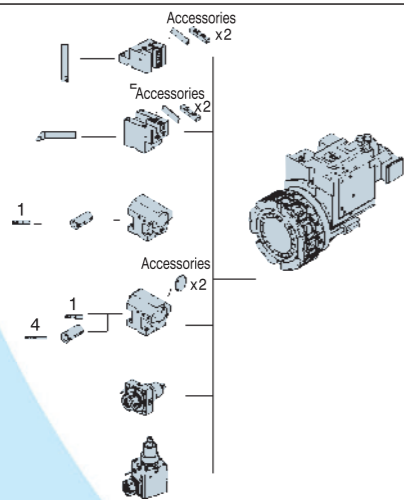





No.	Tool Model	ST-40 / 60 / 70 series		ST-80 / 100 / 130 / 160 / 200 / 240 series	
		Metric System	Imperial System	Metric System	Imperial System
1	Bore	φ 12, φ 16, φ 20, φ 25, φ 32, φ 40, φ 50	φ 1/2", φ 5/8", φ 3/4", φ 1", φ 1-1/4", φ 1-1/2", φ 2"	φ 12, φ 16, φ 20, φ 25, φ 32, φ 40, φ 50, φ 60	φ 1/2", φ 5/8", φ 3/4", φ 1", φ 1-1/4", φ 1-1/2", φ 2", φ 3"
2	End	□ 32	□ 1-1/4"	□ 32	□ 1-1/4"
3	Outer dia.	□ 32	□ 1-1/4"	□ 32	□ 1-1/4"
4	Drill	MT#2, #3, #4, #5		MT#2, #3, #4, #5	

There are any other different kinds of spindle speed for your choice.





ST-A Series with Auto 2-speed Gear Box

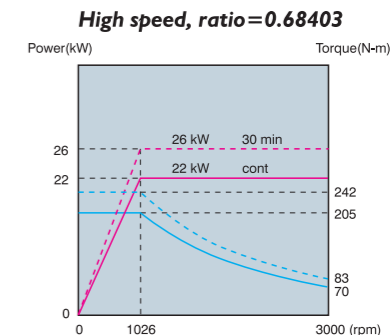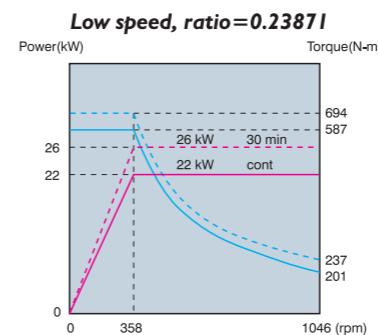





ST-B Series with Auto 4-speed Gear Box

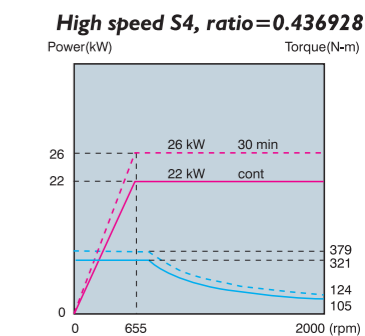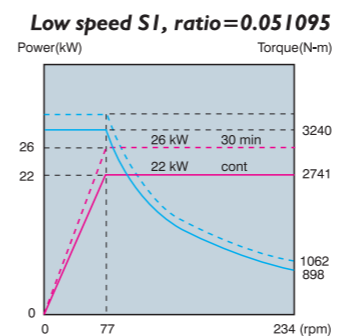

ST-C Series with Auto 4-speed Gear Box

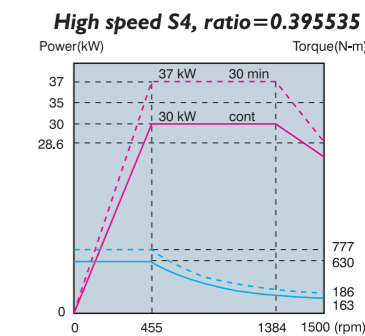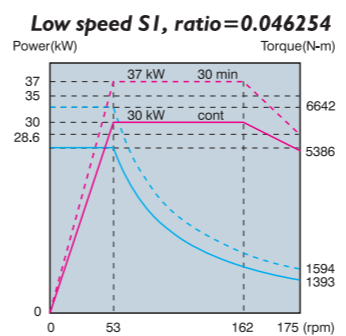


ST-D Series with Auto 4-speed Gear Box

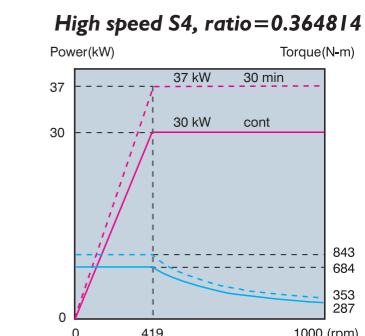

Power Turret with C-Axis/C+Y-Axis Function

Twin-Turret CNC Lathes

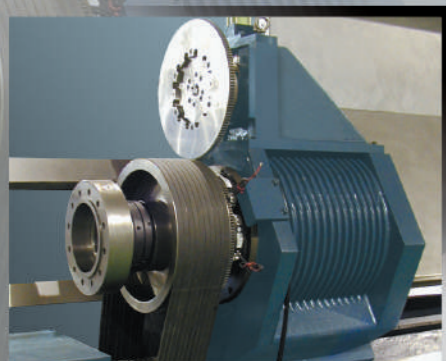


C.F. Axis

C-axis or C+Y-axis provides flexible turning performance for handling cam or special profiled parts that need milling / drilling / tapping operations. 0.001 degree indexing allows accurate circular positioning.




Power Turret with C-Axis

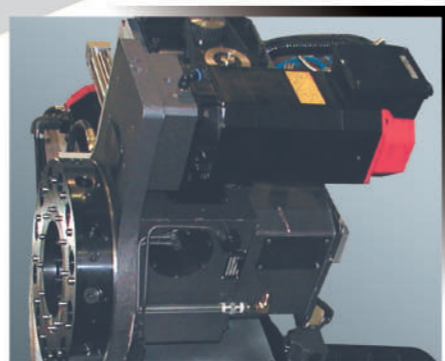

Power Turret with C+Y-Axis

Examples for Machining with Live Tools

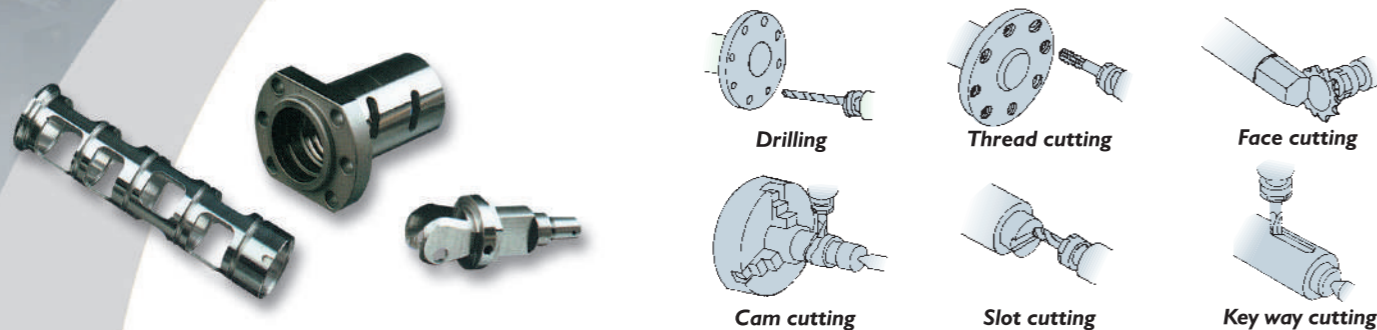

Standard Features-Great Equipment

★ Working capacity of rotating tools: (Material type: S45C σ 50~70 kgf/mm²)

Item	Model	ST-40~70 A, AH, AX, B, BH, BX, C, CH, CX Series ST-80~240 B, BH, BX Series	ST-80~240 C, CH, CX, D, DH, DX Series
Power turret model		TBMA 250 / TBYA250 (for Y-Axis)	TBMA 320 / TBYA320 (for Y-Axis)
Max. speed of turret		3276 rpm	2000 rpm
Twist drilling	$d \times a$ (mm)x(mm/ μ)	22 x 0.20	25 x 0.5
Slot milling	$d \times P \times a$ (mm)x(mm)x(mm/min)	25 x 20 x 40 (0.98" x 0.79" x 1.57")	40 x 20 x 35 (1.57" x 0.79" x 1.38")
Tapping	$d \times p$ (mm)x(mm)	M18 x 2	M24 x 3
Toolholder shaft size		ϕ 50	ϕ 60
Motor horsepower		AC 5.5 / 3.7 kW	AC 7.5 / 5.5 kW


Item	Model	ST-40~70 A, AH, AX, B, BH, BX, C, CH, CX Series ST-80~240 B, BH, BX Series	ST-80~240 C, CH, CX, D, DH, DX Series
Power turret model		BMT 75 / ER 40	BMT 85 / ER 50
Max. speed of turret		3000 rpm	3000 rpm
Twist drilling	$d \times a$ (mm)x(mm/ μ)	26 x 0.16	34 x 0.14
Slot milling	$d \times P \times a$ (mm)x(mm)x(mm/min)	30 x 15 x 115 (1.18" x 0.59" x 4.53")	40 x 20 x 95 (1.57" x 0.79" x 3.74")
Tapping	$d \times p$ (mm)x(mm)	M22 x 2.5	M26 x 3.0
Toolholder shaft size		ϕ 75	ϕ 85
Motor horsepower		AC 5.5 / 7.5 kW	AC 7.5 / 11 kW




Option Application-
LH: Grinding Head
RH: Y Axis + Power Turret
Steady Rest (Auto Self-centering)



Option Application-
LH: VDI Turret
RH: 12-Angle Turret
Steady Rest (Special Order Made)

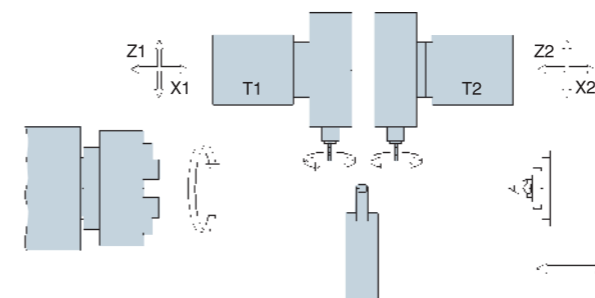

Spindle Construction

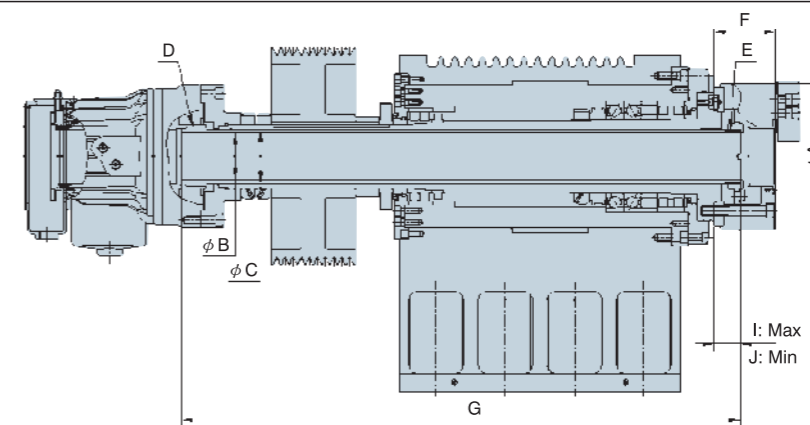

Unit: mm





Model	Dimension	ϕ A	ϕ B	ϕ C	D	E	F	G	I	J
ST-40/60/70, A	Std.	304 (12")	ϕ 91 (3.6")	ϕ 115 (4.5")	M100 x P2.0	M100 x P2.0	122 (4.8")	1071 (42")	54 (2.1")	31 (1.2")
	Opt.	381 (15")					160 (6.3")			
ST-40/60/70, B	Std.	381 (15")	ϕ 116 (4.6")	ϕ 132.5 (5.2")	M130 x P2.0	M130 x P2.0	149 (5.9")	1088 (42.8")	72 (2.8")	49 (1.9")
	Opt.	450 (17.7")								
ST-40/60/70, C	Std.	510 (20.1")	ϕ 139 (5.5")	ϕ 152 (6")	M175 x P3.0	M150 x P2.0	155 (6.1")	1264 (49.8")	76 (3")	53 (2.1")
	Opt.	610 (24")					183 (7.2")			
ST-80/100/130/160/200/240, B	Std.	381 (15")	ϕ 116 (4.6")	ϕ 132.5 (5.2")	M130 x P2.0	M130 x P2.0	149 (5.9")	1088 (42.8")	72 (2.8")	49 (1.9")
	Opt.	450 (17.7")								
ST-80/100/130/160/200/240, C	Std.	510 (20")	ϕ 139 (5.5")	ϕ 152 (6")	M175 x P3.0	M150 x P2.0	155 (6.1")	1264 (49.8")	76 (3")	53 (2.1")
	Opt.	610 (24")					183 (7.2")			
ST-80/100/130/160/200/240, D	Std.	510 (20")	ϕ 165 (6.5")	ϕ 185 (7.3")	M175 x P3.0	M180 x P3.0	155 (6.1")	1108 (43.6")	76 (3")	53 (2.1")
	Opt.	610 (24")					183 (7.2")			
ST-80/100/130/160/200/240, E	Std.	610 (24")	ϕ 204 (8")	ϕ 236 (9.3")	M215 x P3.0	M215 x P3.0	183 (7.2")	1127.5 (44.4")	96 (3.8")	70 (2.8")

Features:

- The ST series machines can be constructed with one spindle plus two turrets. By the two systems, these machines can make the same or different machining on both sides of workpiece.
- For example, when a quill or a tube is machining on this kind of ST machine, it can cut the workpiece on the outer diameter and the inner diameter at the same time to achieve good circularity and performance.
- For performance, this ST machine is constructed like combining two lathes into one. The two systems are not only operated individually but also can work together to finish all of the machining jobs of a workpiece.
- Using this machine is the same as operating two lathes, but it can reduce the floor area on machine, worker employment, and the time for workpiece handling and operation.
- All of the machining jobs of a workpiece can be finished at a time to get good circularity.
- Equipping with a power turret, the ST machine can also do the machining of drilling, milling, or grinding.

B-Axis Working Capacity/Range

B-Axis Function

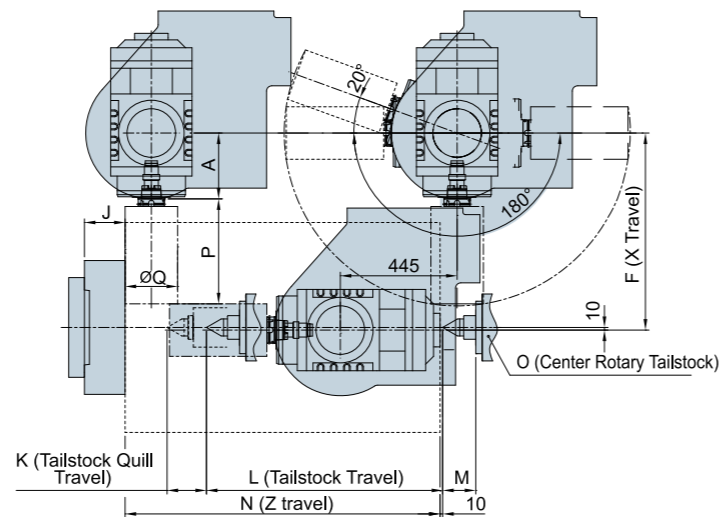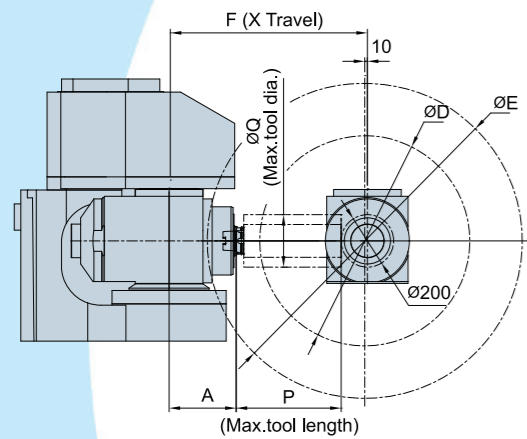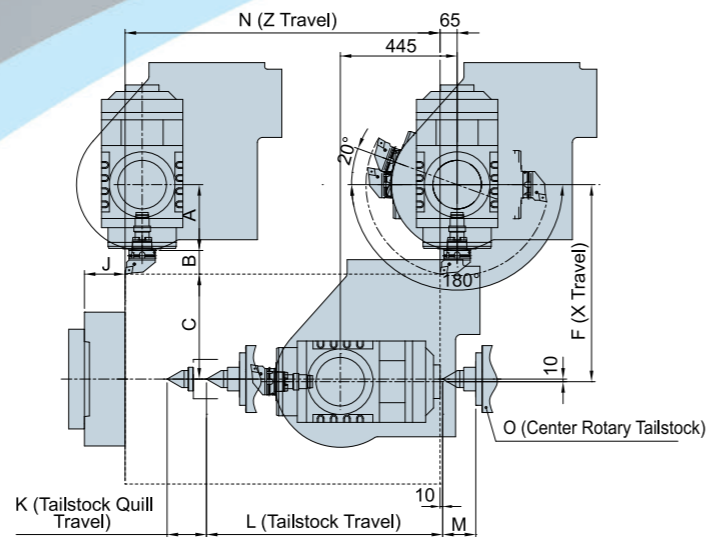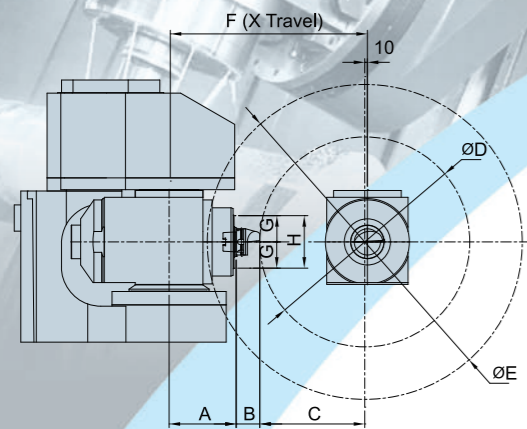

Unit: mm

Model / Item	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q
ST-40											500 (19.7")		800 (31.5")			
ST-60											900 (35.4")		1200 (47.2")	MT.5		
ST-70											1300 (51.2")		1600 (63")			
ST-80											1700 (66.9")		2000 (78.7")			
ST-100	251 (9.9")	90 (3.5")	400 (15.7")	800 (31.5")	1200 (47.2")	960 (37.8")	100 (3.9")	200 (7.9")	155 (6.1")	150 (5.9")	2100 (82.7")	126 (5")	2400 (94.5")		400 (15.7")	200 (7.9")
ST-130											2800 (110")		3050 (120.1")			
ST-160											3750 (147.6")		4050 (159.4")	MT.7		
ST-200											4750 (187")		5050 (198.8")			
ST-240											5400 (212.6")		6050 (238.2")			



Turning-Milling-Drilling Spindle Specifications

Spindle model	-	-
Max. power at 100% duty cycle	kW	38
Max. torque	Nm	252
Max. speed	rpm	6000
Tool system	-	HSK-A100 (Std.) / Capto C8 (Opt.)
Tool clamping system	-	OTT Jaws
Clamping force	Kgf	4500±100
Tooling cleaning	-	Automatic
Spindle bearing front	-	SKF-7020 CD
Bearing lubrication	-	Grease
Spindle cooling	-	Water glycol
Cooling performance	kW	-
Cooling temperature	°C	20
Cooling volume approx	ℓ/min	-
External coolant supply	pcs	4
Coolant thru spindle	bar	20 (Std.) / Max. 70 (Opt.)
Run out of taper bore	mm	≤0.2
Run out of test bar on spindle nose	mm	≤0.2
Run out 300 mm of test bar	mm	≤0.8
Balancing class (ISO 1940)	-	G1

Rotary unit Specifications

Driver	-	Gear
Diameter of turret	mm	Ø240
Center Height	mm	345
Through hole	mm	-
Servo motor	kW	4
Gear ratio	-	1/120
Max. rotation speed	rpm	25
Min. increment	degree	0.001
Rotation range	degree	-110 / +90
Output rated torque	Nm	1440
Hydraulic brake pressure	bar	40
Brake torque	Nm	1550
Index accuracy	sec	±12
Repeatability	sec	±7
Weight (included spindle)	kg	600
Angular encoder	-	ERM 280-180
Angular encoder accuracy	sec	±12

Specifications

Item	Model	ST-40A/60A/70A	ST-40B/60B/70B	ST-40C/60C/70C	ST-80B/100B/130B 160B/200B/240B	ST-80C/100C/130C 160C/200C/240C	ST-80D/100D/130D 160D/200D/240D
Swing over bed (mm)		790 (31.1")	790 (31.1")	790 (31.1")	920 (36.2")	920 (36.2")	920 (36.2")
Swing over cross slide (mm)		600 (23.6")	600 (23.6")	600 (23.6")	700 (27.6")	700 (27.6")	700 (27.6")
Chuck size (mm)		304 (12") (Std.) 381 (15") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)
Bar capacity (mm)		91 (3.6") (Std.) 102 (4") (Opt.)	116 (4.6")	139 (5.5")	116 (4.6")	139 (5.5")	165 (6.5")
Spindle nose		A2-8 / A2-11 (Opt.)	A2-11	A2-15	A2-11	A2-15	A2-15
Spindle bore (mm)		115 (4.5")	132.5 (5.2")	152 (6")	132.5 (5.2")	152 (6")	185 (7.3") / Geared headstock 176 (6.9")
Spindle speed, step (s)		Auto Hi-Lo	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds
Spindle speed range (rpm)	Belt type gear box	3000 for 12" (91) chuck 2800 for 12" (102) chuck 2500 for 15" (102) chuck	2000	1500 (Std.) 1400 (Opt.)	2000	1500 (Std.) 1400 (Opt.)	1000
	Geared headstock	-	-	1200	-	1200	1000
Spindle motor (kW) (30 min / con.)		22 / 26	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)
Spindle bearing diameter (mm)		160 (6.3")	180 (7.1")	200 (7.9")	180 (7.1")	200 (7.9")	240 (9.4")
No. of tools		12					
Cross travel (X-axis) (mm)		320 (12.6")			370 (14.6")		
Y-axis travel (Opt.) (mm)		± 75 (3")					
Longitudinal travel (Z-axis) (mm)		800 / 1200 / 1600 (31.5" / 47.2" / 63")			2000 / 2400 / 3050 (78.7" / 94.5" / 120.1") 4050 / 5050 / 6050 (159.4" / 198.8" / 238.2")		
Rapid traverse (m/min)		X: 15 / Y: 10 / Z: 18			X: 10 / Y: 10 / Z: 12		
Tailstock travel (mm)		500 / 900 / 1300 (19.7" / 35.4" / 51.2")			1700 / 2100 / 2800 (66.9" / 82.7" / 110.2") 3600 / 4600 / 5400 (141.7" / 181.1" / 212.6")		
Tailstock quill travel (mm)		125 (4.9")			150 (5.9")		
Tailstock quill diameter (mm)		φ 125 (4.9")			φ 200 (7.9")		
Tailstock Spindle taper (kW)		MT#5			MT#7		
Servo motor (X-axis) (kW)		4			7		
Servo motor (Y-axis)(Opt.) (kW)		3					
Servo motor (Z-axis) (kW)		4			7		
Bed inclination		60°					
Weight (kg) (lb)		11000 / 12000 / 13100 (24200/26400/28820)	11100 / 12100 / 13200 (24420/26620/29040)	11150 / 13150 / 13250 (24530/ 28930/ 29150)	15000 / 16500 / 20100 (33000/ 36300/ 44220) 24100 / 28100 / 32100 (53020/ 61820/ 70620)	15300 / 16800 / 20300 (33660/ 36960/ 44660) 24200 / 28200 / 32200 (53240/ 62040/ 70840)	15500 / 17000 / 20500 (34100/ 37400 / 45100) 24500 / 28500 / 32500 (53900/ 62700 / 71500)
Machine dimensions (mm)	W x H	2270 x 2765 (89.4" x 108.9") 2290 x 2765 (90.2" x 108.9") (for ST-70)			2504 x 2895 (98.6" x 114")		
	L	5132 / 6195 / 6482 (202" / 243.9" / 255.2")			7412 / 7812 / 8612 / 9926 / 11267 / 11667 (291.8" / 307.6" / 339.1" / 390.8" / 443.6" / 459.3")		

■ All data subject to change without notice.

■ VDI turret working capacity / Range (see page 8).

■ All the specifications are listed with the FANUC CNC system and 12-angle turret.

Item	Model	ST-40AH/ 60AH / 70AH	ST-40BH/ 60BH / 70BH	ST-40CH/ 60CH / 70CH	ST-80BH/100BH/130BH 160BH/200BH/240BH	ST-80CH/100CH/130CH 160CH/200CH/240CH	ST-80DH/100DH/130DH 160DH/200DH/240DH
Swing over bed (mm)		920 (36.2")	920 (36.2")	920 (36.2")	1000 (39.4")	1000 (39.4")	1000 (39.4")
Swing over cross slide (mm)		700 (27.6")	700 (27.6")	700 (27.6")	800 (31.5")	800 (31.5")	800 (31.5")
Chuck size (mm)		304 (12") (Std.) 381 (15") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)
Bar capacity (mm)		91 (3.6") (Std.) 102 (4") (Opt.)	116 (4.6")	139 (5.5")	116 (4.6")	139 (5.5")	165 (6.5")
Spindle nose		A2-8/ A2-11 (Opt.)	A2-11	A2-15	A2-11	A2-15	A2-15
Spindle bore (mm)		115 (4.5")	132.5 (5.2")	152 (6")	132.5 (5.2")	152 (6")	185 (7.3") / Geared headstock 176 (6.9")
Spindle speed, step (s)		Auto Hi-Lo	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds
Spindle speed range (rpm)	Belt type gear box	3000 for 12"(91) chuck 2800 for 12"(102) chuck 2500 for 15"(102) chuck	2000	1500 (Std.) 1400 (Opt.)	2000	1500 (Std.) 1400 (Opt.)	1000
	Geared headstock	-	-	1200	-	1200	1000
Spindle motor (kW) (30 min / con.)		22 / 26	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)
Spindle bearing diameter (mm)		160 (6.3")	180 (7.1")	200 (7.9")	180 (7.1")	200 (7.9")	240 (9.4")
No. of tools		12					
Cross travel (X-axis) (mm)		370 (14.6")			420 (16.5")		
Y-axis travel (Opt.) (mm)		± 75 (3")					
Longitudinal travel (Z-axis) (mm)		800 / 1200 / 1600 (31.5" / 47.2" / 63")			2000 / 2400 / 3050 (78.7" / 94.5" / 120.1") 4050 / 5050 / 6050 (159.4" / 198.8" / 238.2")		
Rapid traverse (m/min)		X: 15 / Y: 10 / Z: 18			X: 10 / Y: 10 / Z: 12		
Tailstock travel (mm)		500 / 900 / 1300 (19.7" / 35.4" / 51.2")			1700 / 2100 / 2800 (66.9" / 82.7" / 110.2") 3600 / 4600 / 5400 (141.7" / 181.1" / 212.6")		
Tailstock quill travel (mm)		125 (4.9")			150 (5.9")		
Tailstock quill diameter (mm)		φ 125 (4.9")			φ 200 (7.9")		
Tailstock Spindle taper (kW)		MT#5			MT#7		
Servo motor (X-axis) (kW)		7					
Servo motor (Y-axis)(Opt.) (kW)		3					
Servo motor (Z-axis) (kW)		7					
Bed inclination		60°					
Weight (kg) (lb)		11000 / 12100 / 13200 (24200/26620/29040)	11200 / 12200 / 13300 (24640/ 26840/ 29260)	11250 / 13250 / 13350 (24750/29150/29370)	15100 / 16600 / 20200 (33220/ 36520/ 44440) 24200 / 28200 / 32200 (53240/ 62040/ 70840)	15400 / 16900 / 20400 (33880/ 37180/ 44880) 24400 / 28400 / 32400 (53680/ 62480/ 71280)	15600 / 17100 / 20600 (34320/ 37620/ 45320) 24600 / 28600 / 32600 (54120/ 62920/ 71720)
Machine dimensions (mm)	W x H	2270 x 2765 (89.4" x 108.9") 2290 x 2765 (90.2" x 108.9") (for ST-70)			2504 x 2955 (98.6" x 116.3")		
	L	5132 / 6195 / 6482 (202" / 243.9" / 255.2")			7412 / 7812 / 8612 / 9926 / 11267 / 11667 (291.8" / 307.6" / 339.1" / 390.8" / 443.6" / 459.3")		

■ All data subject to change without notice.

■ VDI turret working capacity / Range (see page 8).

■ All the specifications are listed with the FANUC CNC system and 12-angle turret.

Specifications

CNC Control Specs

Item	Model	ST-40AX 60AX/70AX	ST-40BX 60BX/70BX	ST-40CX 60CX/70CX	ST-80BX/100BX/130BX 160BX/200BX/240BX	ST-80CX/100CX/130CX 160CX/200CX/240CX	ST-80DX/100DX/130DX 160DX/200DX/240DX
Swing over bed (mm)		1020 (40.2")	1020 (40.2")	1020 (40.2")	1200 (47.2")	1200 (47.2")	1200 (47.2")
Swing over cross slide (mm)		800 (31.5")	800 (31.5")	800 (31.5")	1000 (39.4")	1000 (39.4")	1000 (39.4")
Chuck size (mm)		304 (12") (Std.) 381 (15") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	381 (15") (Std.) 450 (17.7") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)	510 (20.1") (Std.) 610 (24") (Opt.)
Bar capacity (mm)		91 (3.6") (Std.) 102 (4") (Opt.)	116 (4.6")	139 (5.5")	116 (4.6")	139 (5.5")	165 (6.5")
Spindle nose		A2-8 / A2-11 (Opt.)	A2-11	A2-15	A2-11	A2-15	A2-15
Spindle bore (mm)		115 (4.5")	132.5 (5.2")	152 (6")	132.5 (5.2")	152 (6")	185 (7.3") / Geared headstock 176 (6.9")
Spindle speed, step (s)		Auto Hi-Lo	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds	Auto 4 speeds
Spindle speed range (rpm)	Belt type gear box	3000 for 12"(91) chuck 2800 for 12"(102) chuck 2500 for 15"(102) chuck	2000	1500 (Std.) 1400 (Opt.)	2000	1500 (Std.) 1400 (Opt.)	1000
	Geared headstock	-	-	1200	-	1200	1000
Spindle motor (kW) (30 min / con.)		22 / 26	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	22 / 26 (Std.) 30 / 37 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)	30 / 37 (Std.) 37 / 45 (Opt.)
Spindle bearing diameter (mm)		160 (6.3")	180 (7.1")	200 (7.9")	180 (7.1")	200 (7.9")	240 (9.4")
No. of tools		12					
Cross travel (X-axis) (mm)		420 (16.5")			520 (20.5")		
Y-axis travel (Opt.) (mm)		±75 (3")					
Longitudinal travel (Z-axis) (mm)		800 / 1200 / 1600 (31.5" / 47.2" / 63")			2000 / 2400 / 3050 (78.7" / 94.5" / 120.1") 4050 / 5050 / 6050 (159.4" / 198.8" / 238.2")		
Rapid traverse (m/min)		X: 12 / Y: 10 / Z: 16			X: 10 / Y: 10 / Z: 10		
Tailstock travel (mm)		500 / 900 / 1300 (19.7" / 35.4" / 51.2")			1700 / 2100 / 2800 (66.9" / 82.7" / 110.2") 3600 / 4600 / 5400 (141.7" / 181.1" / 212.6")		
Tailstock quill travel (mm)		125 (4.9")			150 (5.9")		
Tailstock quill diameter (mm)		φ 125 (4.9")			φ 200 (7.9")		
Tailstock Spindle taper (kW)		MT#5			MT#7		
Servo motor (X-axis) (kW)		7					
Servo motor (Y-axis)(Opt.)(kW)		3					
Servo motor (Z-axis) (kW)		7					
Bed inclination		60°					
Weight (kg) (lb)		11200 / 12200 / 13300 (24640/26840/29260)	11300 / 12300 / 13400 (24860/ 27060/ 29480)	11350 / 13350 / 13450 (24970/29370/ 29590)	15200 / 16700 / 20300 (33440/ 36740/ 44660)	15500 / 17000 / 20600 (34100/ 37400/ 45320)	15700 / 17200 / 20700 (34540 / 37840 / 45540)
Machine Dimensions (mm)	W x H	2270 x 2765 (89.4" x 108.9") 2290 x 2765 (90.2" x 108.9") (for ST-70)			2715 x 3200 (106.9" x 126") (for ST-80) 2645x 3175 (104.1" x 125") (for ST-100 / 130) 2685x 3175 (105.7" x 125") (for ST-160 / 240)		
	L	5132 / 6195 / 6482 (202" / 243.9" / 255.2")			7412 / 7812 / 8612 / 9926 / 11267 / 11667 (291.8" / 307.6" / 339.1" / 390.8" / 443.6" / 459.3")		

■ All data subject to change without notice.

■ VDI turret working capacity / Range (see page 8).

■ All the specifications are listed with the FANUC CNC system and 12-angle turret.

Standard Accessories:

- Coolant system
- Splash guard
- Through hole 3-jaw chuck
- Programmable hydraulic tailstock
- Chain type chip conveyor
- Tool box and various manuals
- Tool holders (direct mounting type)
- Auto lubrication with alarm
- Halogen working lamp
- FANUC 0i-TD controller
- Manual guide 0i (0i TD) ; Manual guide i (31i-B)

Optional Accessories:

- C-axis (C.S axis without gear box / C.F axis with gear box)
- Touch sensor (manual tool presetter)
- Tool holders (VDI type)
- Twin spindle
- Big bore spindle: φ 236, φ 318, φ 360, φ 410, φ 510 for H, X series.
- Steady rest (manual or auto self-centering)
- Headstock sheet-metal with dent-area
- Upper washing ramps



■ CNC system type

O: Std. △: Opt. -: Nil

Type	Model	ST-40~240
Fanuc 0i-TD		○
Fanuc 31i-B		△
Siemens 840D		△
Siemens 828D		△

■ Fanuc specifications

O: Std. △: Opt. -: Nil

	Item	Specifications	0iTD	31i-B	
Display unit	8.4" color LCD		○	-	
	10.4" color LCD		△	○	
Function	Data Server with 2GB CF card		△	△	
	NC program memory	1280M (512KB)	○	○	
	Conversational programming with graphic function	Manual guide 0i / Manual guide i	0iTD / 31i-B / 0iTD (10.4" LCD)	○	-
	No. of tool offset sets		64	99	
	No. of variable command sets		500	500	
	Work coordinate system	G54~G59		○	○

■ Siemens specifications

O: Std. △: Opt. -: Nil

	Item	Specifications	828D	840D
Operator Panel	10.4" color LCD		○	○
	15.1" color LCD		-	△
	Machine panel MCP483C		○	○
	TCU without hard disk	CF card	○	○
Function	PCU 50 with hard disk		-	△
	Ethernet		○	○
	ShopTurn programming		△	△
	Automatic residual material detection		△	△
	Transmit / Peripheral surface transformation		△	△
	Measuring cycles for drilling/milling and turning		△	△